




49U/49T DIMENSIONS(mm)

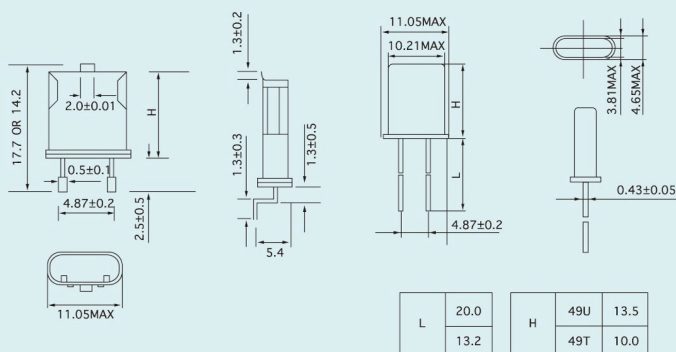

技術指標 / SPECIFICATIONS

類型	TYPE	HC-49U/49T
頻率範圍	Frequency Range	3.500 ~ 100.000MHz
切型	Mode of Vibration	AT;BT
調整頻差	Frequency Tolerance (at25°C)	±5ppm ~ ±30ppm
溫度頻差	Frequency Temperature Characteristics	AT: ±2.5ppm (0°C ~ 50°C) ; ±5ppm (-10°C ~ 60°C) ±10ppm (-20°C ~ 70°C) ; ±30ppm (-40°C ~ 85°C) BT: ±100ppm (-20°C ~ 70°C)
儲藏溫度	Storage Temperature Range	-40°C ~ 85°C
諧振電阻	Equivalent Series Resistance (ESR)	See Table
負載電容	Load Capacitance (CL)	4pf ~ ∞
靜電容	Shunt Capacitance (C0)	< 7pf
絕緣電阻	Insulation Resistance	> 500MΩ At DC 100V
激勵電平	Drive Level	1uW ~ 100uW
老化率	Aging (Year)	±3ppm (Year)

FREQUENCIES vs EQUIVALENT SERIES RESISTANCE

Frequency (MHz)	Mode	ESR (Ω)
1.8432 ≤ f < 3.200	AT Fundamental	400 ~ 100
3.200 ≤ f < 6.000	AT Fundamental	100 ~ 50
6.000 ≤ f < 10.000	AT Fundamental	50 ~ 35
10.000 ≤ f < 35.000	AT Fundamental	35 ~ 25
35.000 ≤ f < 100.000	3 rd overtone	40

除表中所列參數外，可根據客戶需要設計。
We shall design according to customer's requests besides these specifications in the above table.

編帶尺寸圖 / Taping Dimensions

